

600

51-

POWDP20400

DUAL

SLAGMOERSLEUTEL - CLÉ A CHOC - SCHLAGSCHRAUBER LLAVE DE IMPACTO - CHIAVE AD IMPULSI

COMBINE WITH







VOLT

TOOL

POWERPLUS[®]

4003

Ъ







LED WORKLIGH



RATED VOLTAGE

NOMINALE SPANNING TENSION NOMINALE NENNSPANNUNG TENSIÓN NOMINAL TENSIONE NOMINALE

0-2000min⁻¹

ROTATION SPEED TOERENTAL VITESSE DE ROTATION DREHZAHL VELOCIDAD DE ROTACIÓN VELOCITÀ DI ROTAZIONE



IMPACT RATE SLAGFREQUENTIE VITESSE DE FRAPPE SCHLAGSCHRAUBEN VELOCIDAD DE IMPACTO COLPI AL MINUTO



MAX. TORQUE MAX. KOPPEL COUPLE MAX. MAX. DREHMOMENT PAR MÁXIMO COPPIA MAX.

- 1 ANVIL 1/2"

2 LED WORKLIGHT

3 LEFT/RIGHT SWITCH

4 SOFT GRIP5 BELT CLIP

IMPACT WRENCH 40V - POWDP20400

This powerful 40V impact wrench from Dual Power is the perfect tool for tightening or loosening screws and nuts in wood or metal. You can use it when you are changing a wheel and even rusted nuts pose no problem.

The extra powerful motor reaches an impact rate of up to 3300 strokes per minute and a rotation speed of 2000min⁻¹. The hight torque of 350Nm helps you to master every task. With its led working light, you can even work in dark corners without any problems.

It is easy to use and thanks to its light weight and compact design with a soft grip, the impact wrench fits comfortably in your hand.

Separate battery and charger

The battery and charger are not included. They are sold separately and are compatible with the whole Dual Power range.

Which Dual Power battery is compatible?

This 40V impact wrench is only compatible with the 2x20V Dual Power batteries.




DISCOVER THE ENTIRE PRODUCT RANGE AT WWW.DUAL-POWER.COM





TECHNICAL SPECIFICATIONS POWDP20400		FEATURES	BOX CONTENT	SYMBOLS
Rated voltage	40V <u></u>	 Soft grip Left/right switch Belt clip Led worklight 	1x impact wrench	CHEMICAL V SAFETY
Rotation speed	0-2000min ⁻¹		1x belt clip	
Impact rate	0-3300ipm		1x manual	
Max. torque	350Nm		BATTERY NOT INCLUDED	

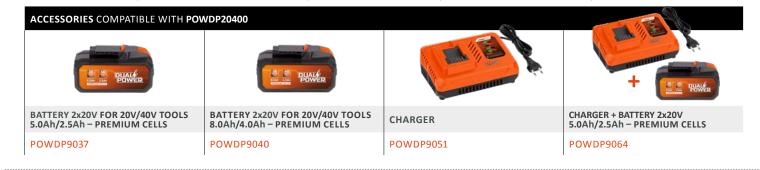



Box (piece)



Our +50 years of experience guarantee a professional and high quality service.